



ISSN 1908-9058

Volume 9

January - December

2016

PUP JOURNAL of science and technology

Official Journal of Science and Technology
Polytechnic University of the Philippines
Sta. Mesa, Manila, Philippines

Produced by:
Institute for Science and Technology Research

Cover Design & Layout by:
Jesusana S. Dejito

Technical Assistance by:
Publications Office

PUP Journal of Science and Technology

Volume 9, January to December 2016

ISSN 1908-9058

Journal Description

The **PUP JOURNAL OF SCIENCE AND TECHNOLOGY (PUPJST)** is a CHED-accredited, double-blind, peer reviewed journal that publishes original articles on theoretical and applied studies in the field of science and technology. It is an annual research publication that aims to provide significant involvement of researchers by presenting novel ideas as well as new knowledge for the advancement of the society in general.

Focus and Scope of Journal

The **PUP JOURNAL OF SCIENCE AND TECHNOLOGY (PUPJST)** publishes original scientific papers and application-focused articles from recent accomplished researches on physical sciences, life sciences, food sciences, nutrition and dietetics, agricultural sciences, environmental sciences, computing and information sciences, mathematics, engineering and technology. The articles must pose valuable hypothesis to derive novel perspectives, verify scientific concepts and innovation in technological advances. The journal does not publish purely descriptive articles that descend from a well-documented exposition, short communication, survey or even a comprehensive review of currently active area of research.

EDITORIAL BOARD

Editor-in-Chief

Armin S. Coronado, *Polytechnic University of the Philippines*

Editorial Members

Dahlia C. Apodaca, *Mines and Geosciences Bureau, Philippines*

Jose Maria P. Balmaceda, *University of the Philippines - Diliman*

Argel A. Bandala, *De La Salle University*

Maribel L. Dionisio-Sese, *University of the Philippines – Los Baños*

Joseph Mercado, *Polytechnic University of the Philippines*

Manuel M. Muhi, *Polytechnic University of the Philippines*

Reinabelle C. Reyes, *Ateneo de Manila University*

Jonathan Richir, *University of Mons, Belgium*

Mary Jane M. Tan, *Polytechnic University of the Philippines*

Orland D. Tubola, *Polytechnic University of the Philippines*

Managing Editor

Gary Antonio C. Lirio, *Polytechnic University of the Philippines*

Section Editors

Lourdes V. Alvarez, *Polytechnic University of the Philippines*
Lincoln A. Bautista, *Polytechnic University of the Philippines*
Kennedy Bongon, *Polytechnic University of the Philippines*
Christian Jay B. Cambiador, *Polytechnic University of the Philippines*
Alexander S. Carrascal, *Polytechnic University of the Philippines*
Michael dela Fuente, *Polytechnic University of the Philippines*
Rogelio G. Dizon, *Polytechnic University of the Philippines*
Elvira C. Labartine, *Polytechnic University of the Philippines*
Esperanza SJ. Lorenzo, *Polytechnic University of the Philippines*
Ria A. Sagum, *Polytechnic University of the Philippines*
John Patrick Sta. Maria, *Polytechnic University of the Philippines*
Jackie B. Urrutia, *Polytechnic University of the Philippines*
Kristian Carlo B. Victorio, *Polytechnic University of the Philippines*

Reviewers

Akira Asakura, *Seto Marine Biological Laboratory (SMBL), Kyoto University, Japan*
Fernando B. Aurigue, *Philippine Nuclear Research Institute*
Melito C. Baccay, *Technological University of the Philippines*
Esperanza C. Cabrera, *De La Salle University*
Jeffrey C. De Vero, *National Institute of Advanced Industrial Science and Technology, Tsukuba, Ibaraki, Japan*
Cecil Jose A. Delfinado, *University of Santo Tomas*
Cynthia C. Divina, *Central Luzon State University*
Julieta Z. Dungca, *Centro Escolar University*
Ford Lumban Gaol, *Bina Nusantara University, Indonesia*
Armando Victor M. Guidote, *Ateneo de Manila University*
Richard N. Muallil, *Mindanao State University, Tawi-Tawi*
Veeranoot Nissapatorn, *University of Malaya, Malaysia*
Michael Y. Roleda, *Norwegian Institute of Bioeconomy Research, Norway*
Edison A. Roxas, *University of Santo Tomas*
Giovanni A. Tapang, *University of the Philippines – Diliman*
Ryan Rhay P. Vicerra, *University of Santo Tomas*
Gilbert U. Yu, *Ateneo de Manila University*

C O N T E N T S

CAPACITIVE DEIONIZATION (CDI): AN ENVIRONMENTALLY FRIENDLY WATER PURIFICATION TECHNIQUE

Ginno L. Andres1-11

DATA SECURITY OF ENCRYPTED DATA USING HASH-BASED MESSAGE AUTHENTICATION CODE (HMAC) AND T9-BASED DATA CONVERSION

Francis G. Balazon12-23

NEUTRALIZING ABILITY OF *Andrographis paniculata* (Burm.f.) Wall. ex Nees STEM AND LEAVES ETHANOLIC EXTRACT AGAINST NEUROTOXICITY INDUCED BY *Naja philippinensis* Taylor, 1922 VENOM BASED ON HISTOLOGICAL CHANGES IN *Danio rerio* (F. Hamilton, 1822) GILLS AND LIVER

Carmelita P. Mapanao, Theresita V. Atienza, Evelyn M. Matchete, Rosalie Anne M. Mangahas, Gilbert S. Agudo, and Clinton B. Bautista24-38

GEOGRAPHIC INFORMATION SYSTEM-ASSISTED APPROACH IN SOIL EROSION HOTSPOT ASSESSMENT OF BANGA MICROCATCHMENT

Carmenchita M. Tumaca39-60

GREEN WAVE: A RESERVED ENERGY SOURCE

Enrico M. Dalangin, Lorissa Joana E. Buenas and Mark Angelo C. Drio61-72

CAPACITIVE DEIONIZATION (CDI): AN ENVIRONMENTALLY FRIENDLY WATER PURIFICATION TECHNIQUE

GINNO L. ANDRES

Graduate School of Science and Engineering, Mechanical Engineering Department, Combustion Laboratory, Ritsumeikan University, 1-1-1 Noji-Higashi, Kusatsu, Shiga, Japan 525-8577

Abstract: A porous carbon electrode for capacitive deionization was prepared by a simple screen printing technique. Polymeric binder suspension was utilized to form a solid activated carbon-based electrode. The prepared carbon electrode electrochemical property and specific capacitance were analyzed using a three-electrode cyclic voltammetry system. The specific capacitance of the developed electrode was almost identical even at various set scan rate and NaCl solution concentration, an indication of the electrode having constant ion adsorption capacity. Thus validated the experimental results, which clearly showed that the ion adsorption capacity of the fabricated electrode presents slight difference at different NaCl solution concentrations, wherein the highest ion adsorption capacity of 6.2 mg/g was achieved in 818 mg/L NaCl solution initial concentration.

Keywords: *capacitive deionization, water purification, carbon electrode, cyclic voltammetry*

1. INTRODUCTION

The effects of global warming have been instigating devastation to the environment and to society. Drought or El Niño season is taking longer time than its usual period especially in the tropical region, thus causing lesser food production and economic fluctuations. The increasing shortage of clean water has become more challenging as it threatens food supply and industrialization (Bian *et al.*, 2015). Other serious issues include rapid population growth and water pollution. All these stimulated scientists and engineers to develop desalination technologies using seawater and brackish water for industrial and human consumption (Chang *et al.*, 2015). Of late, several water purification technologies such as reverse osmosis, multi-stage flash distillation, electrodialysis and membrane processes are being improved for higher production of clean fresh water; however, aside from their drawbacks these techniques are incommensurate in terms of alleviating such global water scarcity (Dong *et al.*, 2015). Therefore, it is timely to introduce an alternative eco-friendly water purification technique to decrease the global water shortage.

Although it is still in its infancy, capacitive deionization (CDI) with accompanying energy regeneration by charge sequestering has the potential to resolve both water and energy shortages (Park *et al.*, 2007; Andreson *et al.*, 2010). Figure 1 demonstrates the principle of capacitive deionization. CDI is a potential induced system in which a positively and negatively charged electrode adsorbs negative and positive ions, respectively. The adsorption of ions at the electrode surface utilizes the principle of electric double layer theory (Farmer *et al.*, 1995), wherein the ions from the ionic liquid are adsorbed due to coulombic interaction rather than electrochemical reaction (Oh *et al.*,

2006). Once the electrode reaches its maximum adsorption capacity and the electrode pores are saturated with ions, the adsorbed ions can be regenerated by simply reversing the applied current or short-circuiting the parallel electrodes. One of the key advantages in CDI is that the stored energy at the electrodes that are electrically charged can be reused for another process in an optimized energy recovery system. CDI is environmentally friendly because there is no need to use chemicals during regeneration. This technique is a simple and nearly maintenance-free system. Furthermore, by utilizing the energy recovery system, the running cost in CDI is more cost-effective than reverse osmosis (RO). In fact, the energy needed to desalinate seawater in RO is 3.5 to 2.5 kWh/m³ with < 30 to 40% water recovery, whereas in CDI, it is only 2 to 1 kWh/m³ with > 80 to 90% water and energy recovery. Thus, CDI is three times more economical than RO for the treatment of 1 million gallons per day of brackish water (Welgemoed and Schutte, 2005).

In this paper, activated charcoal-based electrode was made, and its electrochemical properties were evaluated using cyclic voltammetry (CV) analysis. The ion adsorption/desorption performance of the fabricated CDI cell equipped with a pair of developed electrode was carried out in a NaCl solution with various concentrations.

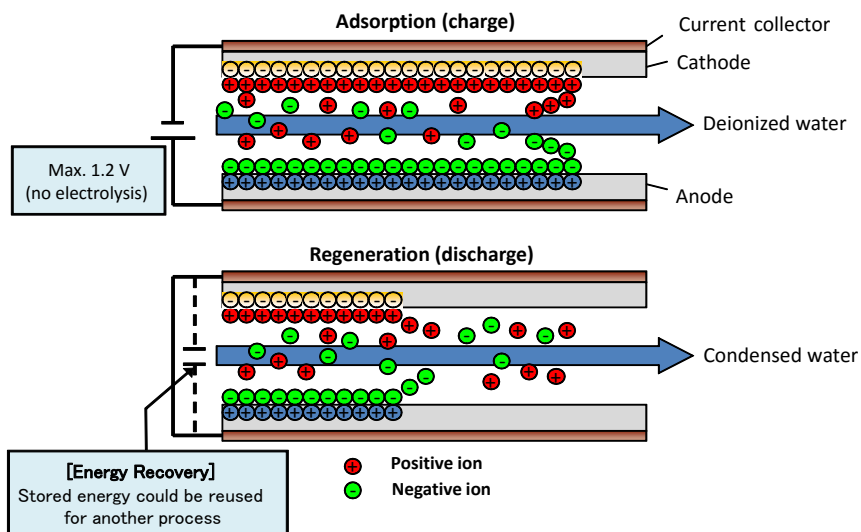


Figure 1. Capacitive deionization and electrode regeneration process.

2. METHODOLOGY

2.1 Fabrication of activated charcoal electrodes

The carbon electrodes were fabricated by mixing activated charcoal powder (ACP, Dainen Corp., Japan, specific surface area = 1,964 m²/g), conductive carbon black (CCB, Nippon Graphite Industries Ltd., Japan, SP-270, average particle size = 4 μm, BET surface area = 250 m²/g), polyvinyl-alcohol (PVA), and N-methyl-2-pyrrolidone (NMP, Nacalai Tesque, Inc., Japan, 99.5%). PVA and NMP were used as the polymeric binder and organic solvent, respectively. The screen printing technique was performed by directly pouring the slurry on a screen to form a solid activated charcoal electrode. These electrodes were dried at room temperature for 24 h, followed by subsequent drying for several hours at 50 °C in a constant temperature oven to evaporate all organic solvents in the electrode pores. The amount and thickness of the dried electrode were then measured. The optimum composition of the electrode was 75% ACP: 10% CCB: 15% PVA mainly due to its high mechanical stability (Andres *et al.*, 2014).

2.2 Cyclic voltammetry analysis

Figure 2 illustrates the experimental set-up and schematic set-up of a three-electrode system when conducting a cyclic voltammetry (CV) analysis. The electrochemical properties of the fabricated electrodes were characterized by three-electrode CV measurement using a potentiostat (HAL 3001, Hokuto Denco, Japan) at 10 mV/s, 5 mV/s and 1 mV/s potential scan speed in 0.5 mol/L and 0.05 mol/L NaCl solution concentrations at 25 °C by keeping the potential scan speed to 1/(dV/dt) constant, the capacitance (C) can be directly calculated as follows:

$$C = \frac{1}{m\nu(V_F - V_{R.P})} \int_{R.P}^F IdV \quad (1)$$

where C (F/g) is the specific capacitance of the carbon electrode, I (A) is the current, $V_{R.P}$ (V) is the rest potential of the electrode and V_F (V) the maximum potential set for CV tests, ν (V/s) is the potential scan rate, and m (g) is weight of the electrode including the binder and CCB after drying (Tian *et al.*, 2015).

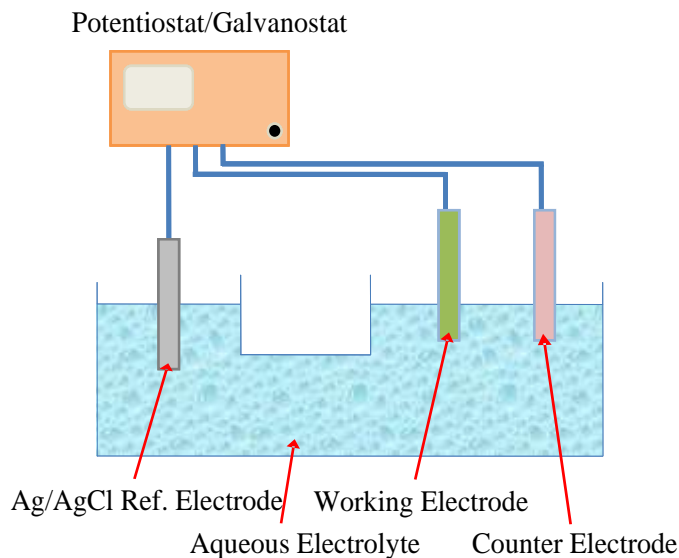


Figure 2. Cyclic voltammetry schematic set-up of a three-electrode system.

The charge efficiency (Λ) was calculated during the ion adsorption process to measure the ions adsorbed on the electrodes through electric double layer interaction (Liu *et al.*, 2015), as described based on the following equation:

$$\Lambda = \frac{\Gamma \times F}{\Sigma} \quad (2)$$

where F is the Faraday constant (96,485 C/mol), Γ is the ion adsorbed capacity (mol/g) and Σ (charge, C/g) was obtained by integrating the corresponding current.

2.3 Ion adsorption/desorption performance

The system structure of the capacitive deionizer was assembled having asymmetrical capacities with a $\delta_{\text{anode}} : \delta_{\text{cathode}}$ thickness ratio of 2:1 as illustrated in Figure 3.

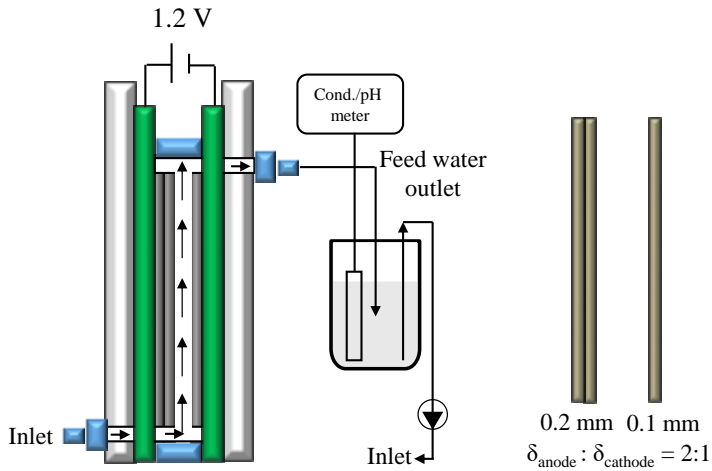


Figure 3. Capacitive deionization flow-process experimental set-up. Electrode pair with asymmetrical capacity.

The apparent amount of the φ_{anode} : φ_{cathode} were 0.47 g: 0.23 g. The ion adsorption/desorption performance of the CDI was carried out in a continuous flow-through process using the prepared NaCl solution with initial ion conductivity range 0.7 to 5 mS/cm. The 150 mL of feed water was constantly flowing using a tube pump with a constant flow rate of 20 mL/min, whilst the changes of ion conductivity was measured using an online ion conductivity probe (pH/conductivity meter, Laqua F-74, HORIBA, Japan) with an interval time of 2 s. For the analysis of electrode ion adsorption capacity, (Q_e) is defined as follows:

$$Q_e = \frac{(C_i - C_f) \times V}{m} \quad (3)$$

where C_i and C_f represent the initial and final NaCl concentration (mg/L), respectively, and V is the total amount of the feed solution flowing within the CDI cell in liters (L), and m is the total weight of the activated charcoal electrode in grams (g).

3. RESULTS AND DISCUSSION

3.1 Cyclic voltammetry analysis

Analysis with cyclic voltammetry is an accurate tool to characterize the electroadsorption capacity and electrochemical property of carbon electrode, since it follows the same working principle of the electric double-layer by charge separation (Hou *et al.*, 2013). Figure 4 presents the cyclic voltammograms obtained in scan rates of 1, 5 and 10 mV/s for 0.5 and 0.05 mol/L NaCl solutions. The summary of the specific

capacitance measurements are shown in Table 1. It can be clearly observed that the cyclic voltammograms in Figure 4(a) using high NaCl concentration electrolyte solution showed good electric double layer characteristics, which close to a rectangular shape. On the other hand, the cyclic voltammograms in low NaCl concentration in Figure 4(b) exhibited slight distortion in particular at 1 mV/s scan rate. These changes of CV characteristics are largely because of the resistance of the liquid electrolyte rather than electrode resistance, wherein low NaCl solution may not be suitable when evaluating the electrochemical characteristics of the electrode. Moreover, Table 1 shows the summary of the specific capacitance and electrical charge during deionization process calculated using equation 1 and 2. The specific capacitance of the electrode varies with scan rate and NaCl solution concentration; however, the average specific capacitances were almost equal, indication of the electrode having constant ion adsorption capacity. The absence of any significant oxidation/reduction peaks in the cyclic voltammograms for both high and low concentration NaCl solutions elucidate ideal behavior of electrochemical double-layer capacitance and highly reversible electroadsorption process (El-Deen *et al.*, 2015).

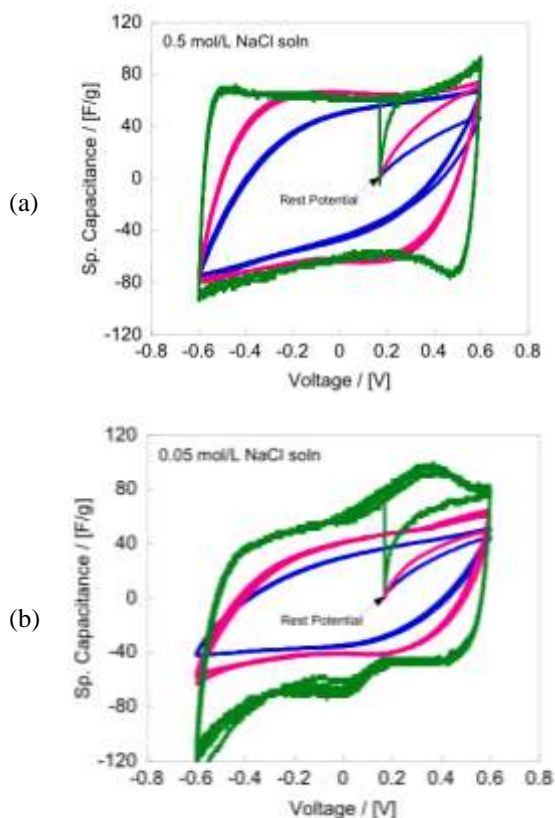


Figure 4. Cyclic voltammograms of the prepared electrode at scan rates of 1, 5 and 10 mV/sec (from outside to inside) in (a) 0.5 mol/L and (b) 0.05 mol/L NaCl.

3.2 Ion adsorption/desorption performance

In order to further evaluate the ion adsorption/desorption performance of the developed electrode, comparative ion adsorption/desorption experiments were executed using different NaCl solution concentrations such as: 426 mg/L (0.730 mS/cm), 818 mg/L (1.40 mS/cm), 1,750 mg/L (3.08 mS/cm), and 2,922 mg/L (5.04 mS/cm) at 1.2 V. Figure 5 presents the voltage-current profiles and ion adsorption/desorption performances of the electrode at various NaCl solution concentrations. And the results of these experiments were summarized in Table 2. Clearly, the ion adsorption performance of the fabricated electrode shows slight difference in ion adsorption capacity at different NaCl solution concentrations, wherein the highest ion adsorption capacity of 6.2 mg/g was achieved in 818 mg/L NaCl solution initial concentration. The charge efficiency normally indicates a lower value than the ideal, mainly caused by the electrode contact resistance with the current collector in addition to the blocking effect of the polymeric binder (Liu *et al.*, 2015). Although the 68% charge efficiency was obtained in 818 mg/L NaCl solution initial concentration, the difference was minimal compared to other NaCl solution concentrations, indicative of a constant ion adsorption capacity of the electrode.

Table 1. Capacitance evaluation of the ACP electrode by CV analysis.

Scan rate [mV/sec]	Sp. Capacitance [F/g]		Charge [Coulomb]	
	0.5 mol/L	0.05 mol/L	0.5 mol/L	0.05 mol/L
10	15	27	62	60
5	45	30	91	70
1	64	62	130	126
AVERAGE	41	40	94	85

Table 2. Ion adsorption characteristics of the ACP electrode.

Initial NaCl conc. [mg/L]	Ion adsorption capacity [mg/g]	Coulomb efficiency [%]
426	5.28	64
818	6.20	68
1,750	6.00	64
2,922	6.10	62

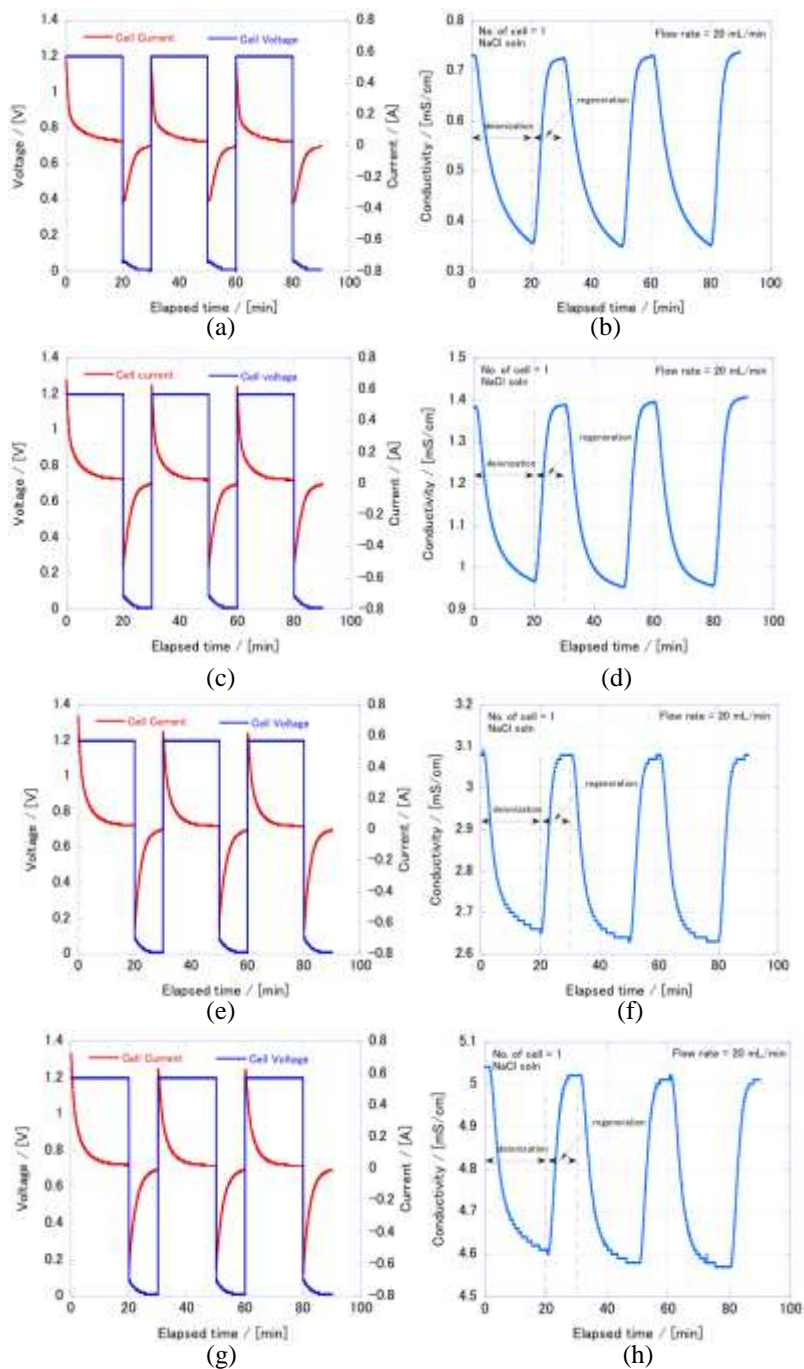


Figure 5. Ion adsorption performance of the electrodes at various NaCl solution concentrations, such as 0.730 mS/cm (426 mg/L), 1.40 mS/cm (818 mg/L), 3.08 mS/cm (1,750 mg/L), and 5.04 mS/cm (2,922 mg/L) at 1.2 V.

To be able to know the competitiveness of this study, the comparative results with regards to the amount of ion adsorption capacity using various electrode materials were summarized in Table 3. In this study, the obtained ion adsorption capacities using various NaCl solution concentrations was very interesting because of its consistency. And compared to many reported electrode materials which uses complicated method of electrode fabrication, the ion adsorption capacity in this study is strongly considerable. Thus, this ideal result could be used as a guide when fabricating CDI module with respect to specific use; for instance, for low and high concentration aqueous electrolytes.

4. CONCLUSIONS

It is known that the electrosorption efficiency of the electrode in capacitive deionization process is directly related to the electro-chemical characteristics of the electrode material and the electrolyte solution concentration. In this paper, the electrochemical property of the developed electrode was characterized by a three-electrode cyclic voltammetry at different NaCl concentrations. The results indicate that utilizing higher concentration liquid electrolyte can provide clearer characteristics of the electrode. Moreover, various NaCl solution concentrations were used as liquid electrolyte to realize the ion adsorption and desorption efficiency of the carbon electrode. Thus, experimental results demonstrated that the ion adsorption capacity and charge efficiency of the CDI system equipped with the developed carbon electrode were almost identical, an indication of performance consistency. This result also means that all effective areas of the carbon electrode can be utilized without electrochemical reaction.

Table 3. Comparison of the capacitive deionization performance on various electrodes.

Original material	Initial NaCl conc. [mg/L]	Operation voltage [V]	Ion adsorption capacity [mg/g]	Reference
GO-PCNF	100	1.2	7.8	Bai <i>et al.</i> , 2014
PCNF	100	1.2	5.9	Bai <i>et al.</i> , 2014
GO-PCNF	450	1.2	13.2	Bai <i>et al.</i> , 2014
PCNF	450	1.2	9.4	Bai <i>et al.</i> , 2014
ACP	600	1.2	4.2	Y.Zhao <i>et al.</i> , 2014
ACP	1000	1.2	8.6	Y.Zhao <i>et al.</i> , 2014
ACP	600	1.6	7.5	Y.Zhao <i>et al.</i> , 2014
PCS1000	500	1.6	5.8	Y.Liu <i>et al.</i> , 2015
ACNF	500	1.6	10.5	J.Liu <i>et al.</i> , 2014
CNT/ACNF	400	1.2	6.4	Q.Dong <i>et al.</i> , 2015
ACP	426	1.2	5.3	This study
ACP	818	1.2	6.2	This study
ACP	1,750	1.2	6.0	This study
ACP	2,922	1.2	6.1	This study

5. ACKNOWLEDGEMENTS

The author acknowledges the financial support received from Japan Ministry of Environment (Kankyosho) and Japan Ministry of Education (Monbukagakusho), the Ritsumeikan University and my supportive professor, Professor Yoshihara Yoshinobu.

6. REFERENCES

- Anderson M. A., Cudero A. L. & Palma J. (2010). Capacitive deionization as an electrochemical means of saving energy and delivering clean water: Comparison to present desalination practices: will it compete? *Electrochimica Acta*, 55(22), 3845-3856.
- Andres G. L., Yano N., Shiyoukei Y., Yoshihara Y. & Tanahashi M. (2014). Development of an ion removal technique based on capacitive deionization for treatment of rinse water from incineration ash. *Journal of Water and Environment Technology*, 12, 261–276.
- Bian Y., Yang X., Liang P., Jiang Y., Zhang C. & Huang X. (2015). Enhanced desalination performance of membrane capacitive deionization cells by packing the flow chamber with granular activated carbon. *Water Research*, 85, 371–376.
- Chang L., Lia J., Duana X. & Liua W. (2015). Porous carbon derived from Metal–organic framework (MOF) for capacitive deionization electrode. *Electrochimica Acta*, 176, 956–964.
- Dong Q., Wang G., Wu T., Peng S. & Qiu J. (2015). Enhancing capacitive deionization performance of electrospun activated carbon nanofibers by coupling with carbon nanotubes. *Journal of Colloid and Interface Science*, 446, 373–378.
- El-Deen A. G., Choi J.-H., Kim C. S., Khalil K. A., Almajid A. A. & Barakat N. A. M., (2015). TiO₂ nanorod-intercalated reduced graphene oxide as high performance electrode material for membrane capacitive deionization. *Desalination*, 361 53-64.
- Farmer J. C., Fix D. V., Mack G. V., Pekala R. W. & Poco J. F. (1995). Capacitive deionization of NaCl and NaNO₃ solutions with carbon aerogel electrodes. *Journal Electrochemistry Society*, 143, 159-169.
- Hou C. H., Huang J. F., Lin H. K. & Wang B. Y. (2012). Preparation of activated carbon sheet electrode assisted electrosorption process. *Journal Taiwan Institute of Chemical Engineering*, 43, 473-479.
- Hou C. H. & Huang C. Y. (2013). A comparative study of electrosorption selectivity of ions by activated carbonelectrodes in capacitive deionization. *Desalination*, 314, 124-129.

- Liu Y., Chen T., Lu T., Sun L., Chua D. H. C. & Pan L. (2015). Nitrogen-doped porous carbon spheres for highly efficient capacitive deionization. *Electrochimica Acta*, 158, 403–409.
- Oh H. J., Lee J. H., Ahn H. J., Jeong Y., Kim Y. J. & Chi C. S. (2006). Nanoporous activated carbon cloth for capacitive deionization of aqueous solution. *Thin Solid Films*, 515, 220-225.
- Park K. K., Lee J. B., Park P. Y., Yoon S. W., Moon J. S., Eum H. M. & Lee C. W. (2007). Development of carbon sheet electrode for electrosorption desalination. *Desalination*, 206, 86-91.
- Tian G., Liu L., Meng Q. & Cao A. (2014). Preparation and characterization of cross-linked quaternised polyvinyl alcohol membrane/activated carbon composite electrode for membrane capacitive deionization. *Desalination*, 354 107-115.
- Welgemoed T. J. & Shutte C. F. (2005). Capacitive Deionization Technology™: An alternative desalination solution. *Desalination*, 183, 327-340.

CONTENTS

ISSN 1908-9058 Volume 9

January to December 2016

CAPACITIVE DEIONIZATION (CDI): AN ENVIRONMENTALLY FRIENDLY WATER PURIFICATION TECHNIQUE

Ginno I. Andres 1-11

DATA SECURITY OF ENCRYPTED DATA USING HASH-BASED MESSAGE AUTHENTICATION CODE (HMAC) AND T9-BASED DATA CONVERSION

Francis G. Balazon 12-23

NEUTRALIZING ABILITY OF *Andrographis paniculata* (Burm.f.) Wall. ex Nees STEM AND LEAVES ETHANOLIC EXTRACT AGAINST NEUROTOXICITY INDUCED BY *Naja philippinensis* Taylor, 1922 VENOM BASED ON HISTOLOGICAL CHANGES IN *Danio rerio* (F. Hamilton, 1822) GILLS AND LIVER

Carmelita P. Mapanao, Theresita V. Atienza, Evelyn M. Matchete, Rosalie Anne M. Mangahas, Gilbert S. Agudo, and Clinton B. Bautista 24-38

GEOGRAPHIC INFORMATION SYSTEM-ASSISTED APPROACH IN SOIL EROSION HOTSPOT ASSESSMENT OF BANGA MICROCATCHMENT

Carmenchita M. Tumaca 39-60

GREEN WAVE: A RESERVED ENERGY SOURCE

Enrico M. Dalangin, Lorissa Joana E. Buenas and Mark Angelo C. Drio 61-72